




# **Kelvin Edge Base**

Designed by Antonio Citterio, 2015



7W - 306lm - 2700-3200K - CRI> 90

Adjustable table lamp providing direct light. Aluminium painted or chromed body, with die cast head, joints and forks, and extruded arms. Diffuser in photoengraved polycarbonate and aluminate on the perimeter. Edge Lighting technology light source. Optical switch sensor placed on the head that provide 3-step dimming function and color temperature adjustment at 2700K or 3200K. Power cord length 150 cm. Plug-in power supply with interchangeable plugs.



### Main specifications

| EAN                    | 8059607004579       |  |
|------------------------|---------------------|--|
| Mounting               | Table               |  |
| Environments           | Indoor dry location |  |
| Light source type      | LED                 |  |
| Light sources included | Yes                 |  |
| LED type               | LED Module          |  |
| Power (W)              | 7                   |  |
| L                      | 306                 |  |

## Physical

| Colour              | White |
|---------------------|-------|
| Length (mm)         | 473   |
| Cord colour         | Clear |
| Net weight (kg)     | 3.9   |
| Package volume (m3) | 0.02  |
| IP internal         | 20    |

#### Download

| Mounting instructions | <b>业</b> PDF |
|-----------------------|--------------|
| Mounting instructions | <b>↓</b> PDF |
| Mounting instructions | <b>↓</b> PDF |

### Photometric Files

LDT / IES



### **Technical Drawings**

2D


















https://professional.flos.com/en/global/product/kelvin-edge-base-f3452009/

F3452009

## Schematic light drawing



#### Photometric

| Lighting type      | Direct    |
|--------------------|-----------|
| Light distribution | Symmetric |
| CCT (K)            | 2700-3200 |
| CRI>               | 90        |
| Extreme cut off    | No        |

### Electrical

| Insulation class   | III                       |  |
|--------------------|---------------------------|--|
| Frequency (Hz)     | 50/60                     |  |
| Main voltage (Vac) | 100-240                   |  |
| Power supply       | Remote included           |  |
| Dimmable           | Yes                       |  |
| Power supply type  | Electronic 24V            |  |
| Dimming interface  | Dimmer Integrated         |  |
| Plug type          | Type G, Type A, Type<br>C |  |
| Batteries inside   | No                        |  |

# **Ecodesign and Energy** Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

### **Spare Parts**

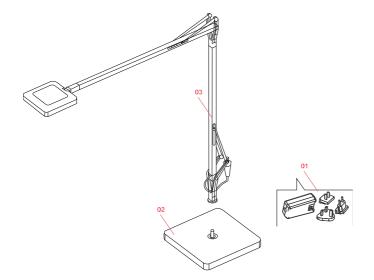

| 01. | White plug assembly kit & 24V | RF6600209 |
|-----|-------------------------------|-----------|
|     | driver                        |           |
| 02. | Kelvin edge white base        | F3451009  |
| 03. | Kelvin edge white body        | F3450009  |







RF6600209

White plug assembly kit & 24V driver

F3451009

Kelvin edge white base

F3450009

Kelvin edge white body