

OE QUASI LIGHT

Designed by Olafur Eliasson

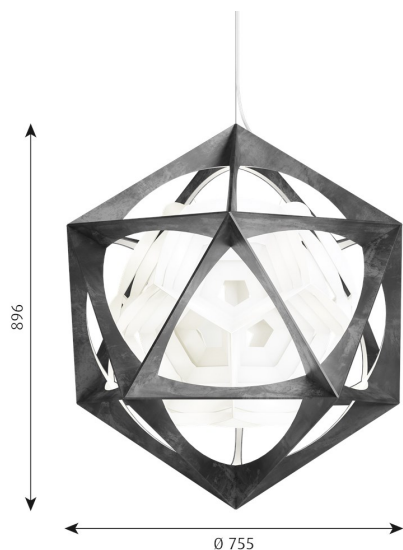

Technical specifications

Materials

Frame: Aluminum. Reflector: Injection molded polycarbonate

Finishes

Clear lacquered, pickled aluminium.
Matte white reflector.

Mounting

Cable type: 4x0,75mm² with wire. Canopy: Yes. LED driver built into the canopy. Cable length: 4m. For mounting instructions, see download section on the product detail page.

Information


This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

OE QUASI LIGHT


Designed by Olafur Eliasson

Light distribution diagrams


CARTESIAN

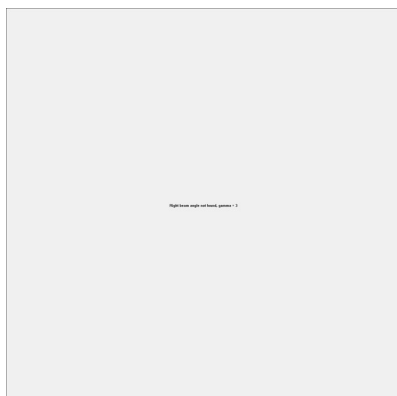

ISOLUX

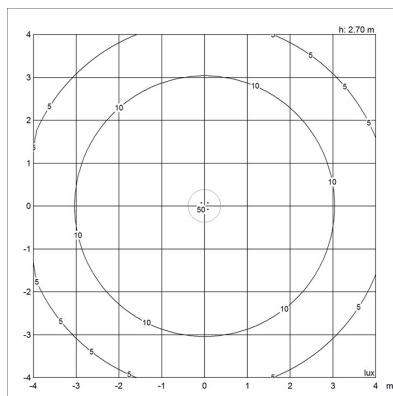

POLAR

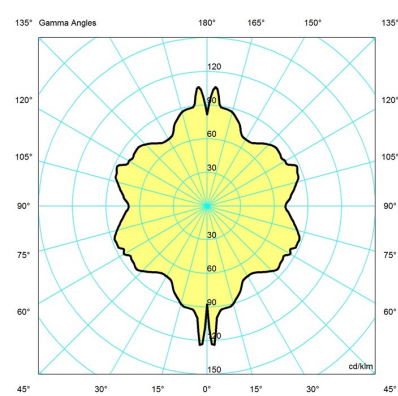

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741101315	LED 2700K 118W		2950	Dali	-
5741101328	LED 3000K 118W		3085	Dali	-
5741101331	LED 2700K 118W		2950	Wireless bluetooth	-
5741101344	LED 3000K 118W		3085	Wireless bluetooth	-

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741101315	DARK ALU, 463	755 / 896 / 755 IN / 21.2 LB
5741101328	DARK ALU, 463	755 / 896 / 755 IN / 21.2 LB
5741101331	DARK ALU, 463	755 / 896 / 755 IN / 21.2 LB
5741101344	DARK ALU, 463	755 / 896 / 755 IN / 21.2 LB