


PH 3-2½ BOLLARD

Designed by Poul Henningsen

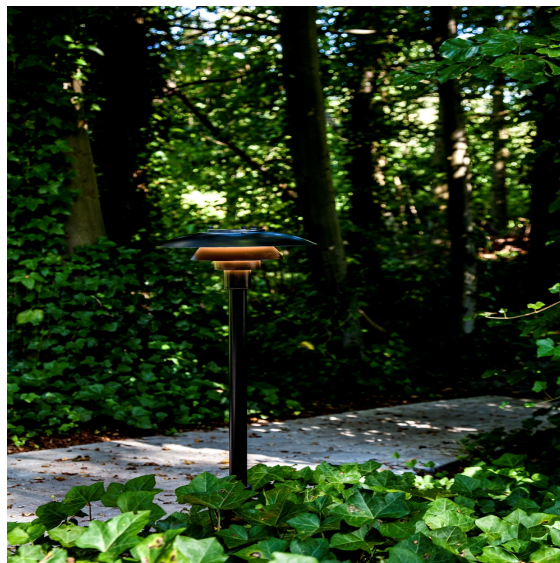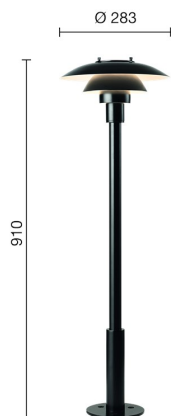

Technical specifications

Materials

Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Form pressed glass. Post: Stainless steel.

Finishes

Black, powder coated.

Mounting

Terminal block: 1x5x2.5mm². Terminal block positioning: In post. Cable entries: 2x bottom entries Ø 17mm. Looping: Approved, max. 5x2,5mm². Post w/base plate for surface mounting: H: 909mm incl. fixture head. Post dia. 32mm. For mounting instructions, see download section on the product detail page.

Information

Earth anchor to be ordered separately. Anchor bolts to be sourced locally. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

PH 3-2½ BOLLARD


Designed by Poul Henningsen

Light distribution diagrams


CARTESIAN

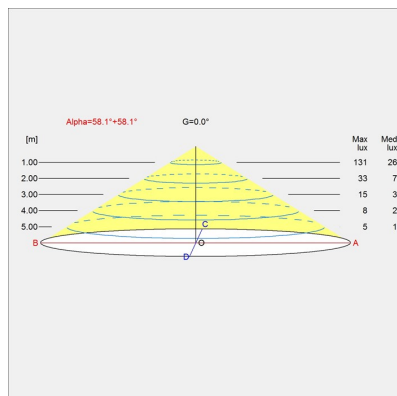

ISOLUX

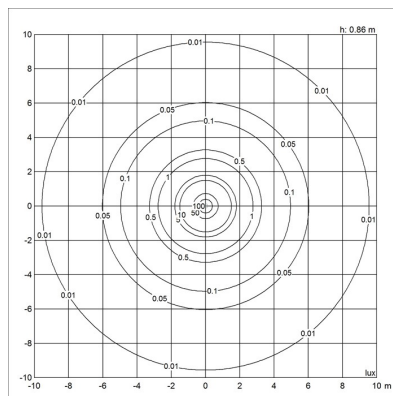

POLAR

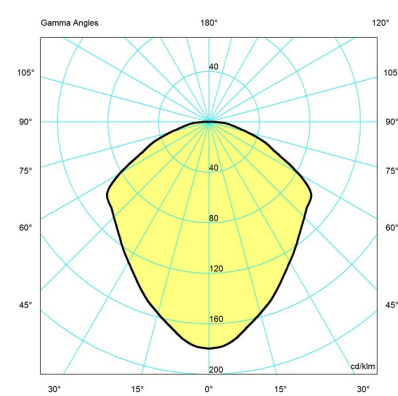

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5747293366	1x20W E27		349	-	-
5747293379	1x20W E27		349	-	-

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5747293366	BLK, 726	283 / 910 / 283 IN / 3.7 LB
5747293379	BLK, 726	283 / 1260 / 283 IN / 4.0 LB