

PH HAT WALL LAMP

Designed by Poul Henningsen

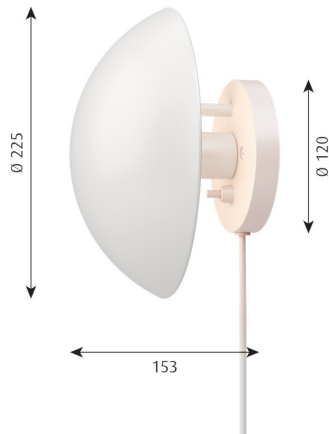

Technical specifications

Materials

Shade: Spun steel. Wall box: Spun steel.

Finishes

White outer shade with rose coloured inner shade, wet painted.

Mounting

Mounting with cord and plug or for hardwiring.
With cord: Cord with plug. Cord length: 2.4m. Light control: On/off switch on wall box.
Without cord for hardwiring: Wall bracket for mounting on wall.
Light control: Two options. Either with on/off switch on wall box or without switch on wall box with turn on/off at main switch. For mounting instructions, see download section on the product detail page.

Information

The fixture is tiltable. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

PH HAT WALL LAMP


Designed by Poul Henningsen

Light distribution diagrams


CARTESIAN

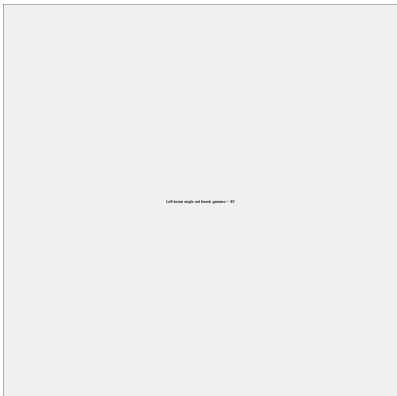

ISOLUX

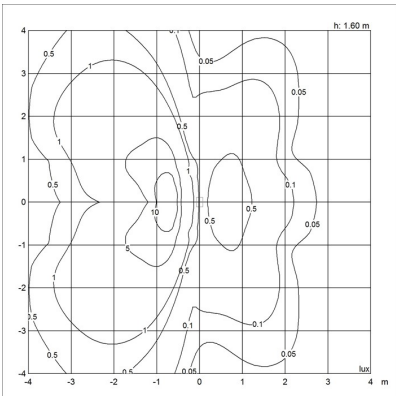

POLAR

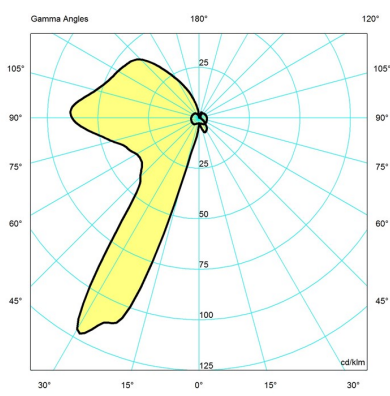

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5743150429	1x20W E14		174	-	Without cord
5743150432	1x20W E14		174	-	Without cord
5743163018	1x20W E14		174	-	With cord

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5743150429	WHT, 015	225 / 225 / 153 IN / 1.6 LB
5743150432	WHT, 015	225 / 225 / 153 IN / 1.8 LB
5743163018	WHT, 015	225 / 225 / 153 IN / 0.8 LB