

PH LOUVRE

Designed by Poul Henningsen

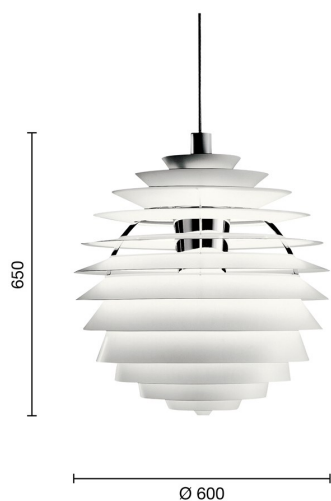

Technical specifications

Materials

Shades: Spun aluminium. Frame: High lustre chrome plated, extruded brass. Housing: High lustre chrome plated, spun aluminium.

Finishes

White, wet painted.

Mounting

Suspension type: Cable 2 x 1 mm² and wire. Canopy or external driver box contains driver. Cable length: 4m. Maximum distance between external driver box and fixture: 20m. For mounting instructions, see download section on the product detail page.

Information

This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

SPECIFICATION NOTES


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

PH LOUVRE


Designed by Poul Henningsen

Light distribution diagrams


CARTESIAN

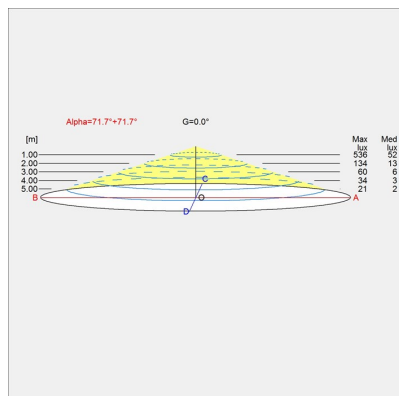

ISOLUX

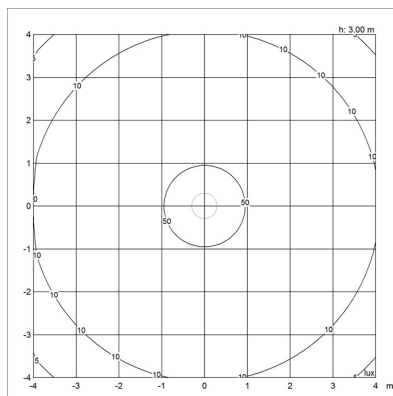

POLAR

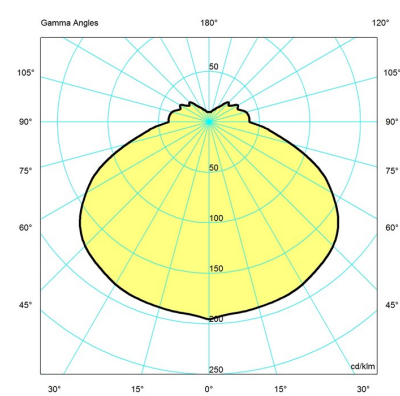

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741094697	LED 2700K 96W		2741	Wireless bluetooth	White textile cord and wire

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741094697	WHT, 015	600 / 650 / 600 IN / 10.3 LB