

Living Tower

Verner Panton, 1969

vitra.





The 'domestic landscape' was a major theme in Sixties Design. Verner Panton's Living Tower was created within this context. With its organic forms, this furniture sculpture can be used on four different levels. Over two metres high, the appealingly upholstered seating tower has a stable understructure made of birch plywood. Users are impressed by its comfort, and the clever arrangement of the interior niches encourages communication.

Materials

- **Structural frame:** birch plywood.
- **Upholstery:** polyurethane foam.

DIMENSIONS (in accordance with EN 1335-1:2000)



Living Tower

Tonus Residential use, F100



Tonus is a classic woollen cloth in a plain weave with an appealingly soft and flexible feel. The deep intensity of Tonus colours – ranging from warm and earthy golds that evoke oriental myths and spices to cool nordic hues in the aquamarine spectrum – lend a unique richness to the fabric.

Tonus is available in 13 colours.

Material	90% new wool, 10% helanca
Weight	490 g/m ² (14.5 oz/y ²)
Width	140 cm (55")
Abrasion resistance	100,000 Martindale
Fastness to light	Type 5
Pilling	Grade 3
Fastness to rubbing	Grade 3-4 dry and wet

57
lime green

58
grass green

50
blue

51
royal blue

02
dark blue

43
truffle

01
black

54
dark red

55
hibiscus


56
dark magenta

03
red

53
dark orange

52
dark yellow

Volo Heavy use, F60

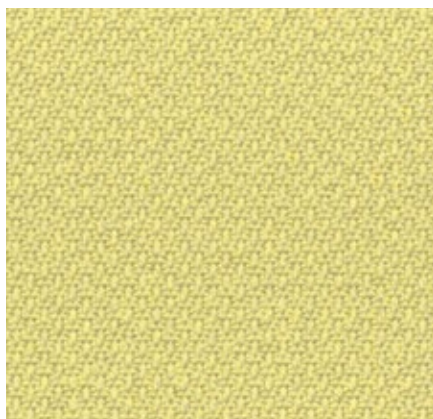

Volo is a finely structured wool blend with a refined weave that gives it an elegant appearance. This expressive textile shows strong solid colours to full advantage while simultaneously offering pleasant tactile qualities. With its soft look and appealing texture, Volo is a perfect fit for home interiors, but it is also well suited for use in the contract sector.

Volo is available in 16 colours.

Material	15% polyamide, 85% new wool
Weight	435 g/m ² (12.8 oz/y ²)
Width	145 cm +/- 3 cm (57")
Abrasion resistance	100,000 Martindale
Fastness to light	Type 6
Pilling	Grade 4-5
Fastness to rubbing	Grade 4-5 dry and wet

